


RNAV (GNSS) RWY 07

421634N 0825719W VAR 7°W

|                         |                                            |                     |                          |                 |
|-------------------------|--------------------------------------------|---------------------|--------------------------|-----------------|
| ● ATIS – 134.5          | ARR Detroit – 118.95 132.35<br>134.3 284.0 | ● TWR – 124.7       | ● GND – 121.7            | ARCAL 124.7(K)* |
| ● MET – 134.5           |                                            | ● TFC – 124.7       | ● MF*                    |                 |
| SAFE ALT 100 NM<br>3100 | WAAS<br>Ch 80124<br>W07A                   | APCH<br>CRS<br>070° | MIN ALT<br>KEDLI<br>2000 | LDA<br>8098     |

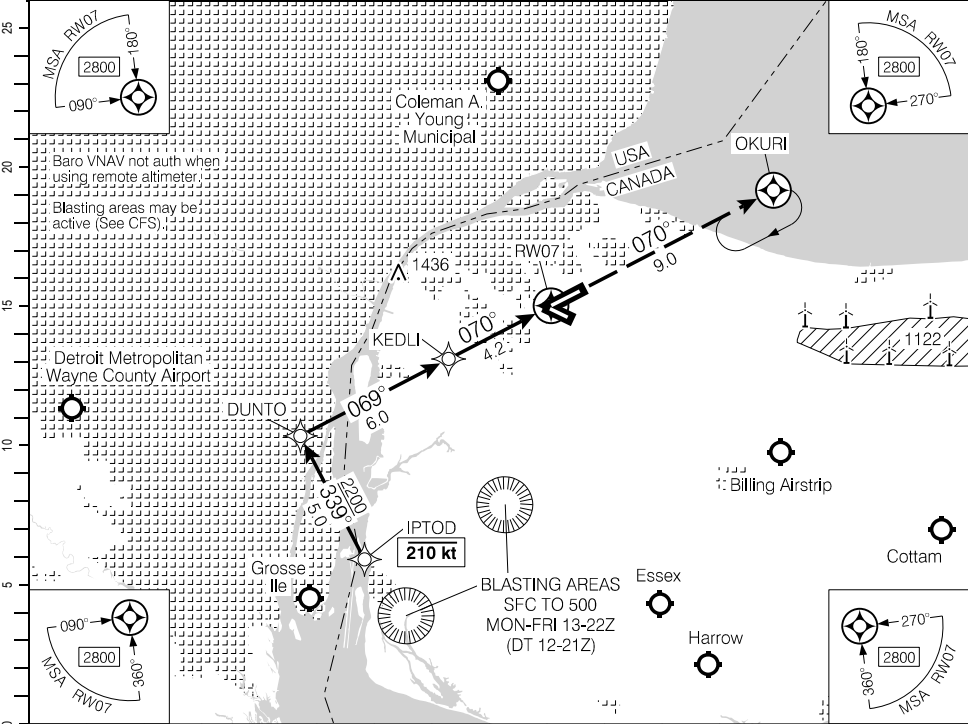

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved

|                           |      |      |      |      |      |      |                       |      |      |      |                                                                                                       |
|---------------------------|------|------|------|------|------|------|-----------------------|------|------|------|-------------------------------------------------------------------------------------------------------|
|                           | 10.2 | 9    | 8    | 7    | 6    | 4.8  | 4                     | 3    | 2    | 1.1  | DIST FROM RW07                                                                                        |
|                           | 3910 | 3540 | 3220 | 2900 | 2580 | 2200 | 1950                  | 1630 | 1310 | 1020 | ALT (3.00° APCH PATH)                                                                                 |
| DUNTO<br>IAWP/IWP<br>3910 |      |      |      |      |      |      | KEDLI<br>FAWP<br>2000 |      |      |      | MISSED APPROACH<br>Climb to <b>2800</b> track <b>070°</b><br>to OKURI. As required,<br>shuttle climb. |
|                           |      |      |      |      |      | 2200 | 2000                  |      |      |      | ELEV 622<br>TDZE 622                                                                                  |
|                           |      |      |      |      |      | 6.0  | 4.2                   |      |      |      |                                                                                                       |
|                           |      |      |      |      |      |      |                       |      |      |      |                                                                                                       |

|                                |        |         |                                      |      |       |    |   |
|--------------------------------|--------|---------|--------------------------------------|------|-------|----|---|
| RASS: When using CYCK add 90°. |        |         | CATEGORY                             | A    | B     | C  | D |
|                                |        |         | LPV                                  | 872  | (250) | 1  |   |
|                                |        |         | LNAV/VNAV<br>(min. -19°C, max. 54°C) | 1038 | (416) | 1½ |   |
|                                |        |         | LNAV                                 | 1020 | (398) | 1¼ |   |
| Knots                          | ft/min | Min:Sec |                                      |      |       |    |   |
| 70                             | 370    |         |                                      |      |       |    |   |
| 90                             | 480    |         |                                      |      |       |    |   |
| 110                            | 580    |         |                                      |      |       |    |   |
| 130                            | 690    |         |                                      |      |       |    |   |
| 150                            | 800    |         |                                      |      |       |    |   |

RNAV (GNSS) RWY 07

CYQG

EFF 21 MAR 24