


CENTRAL DE-ICING FACILITY

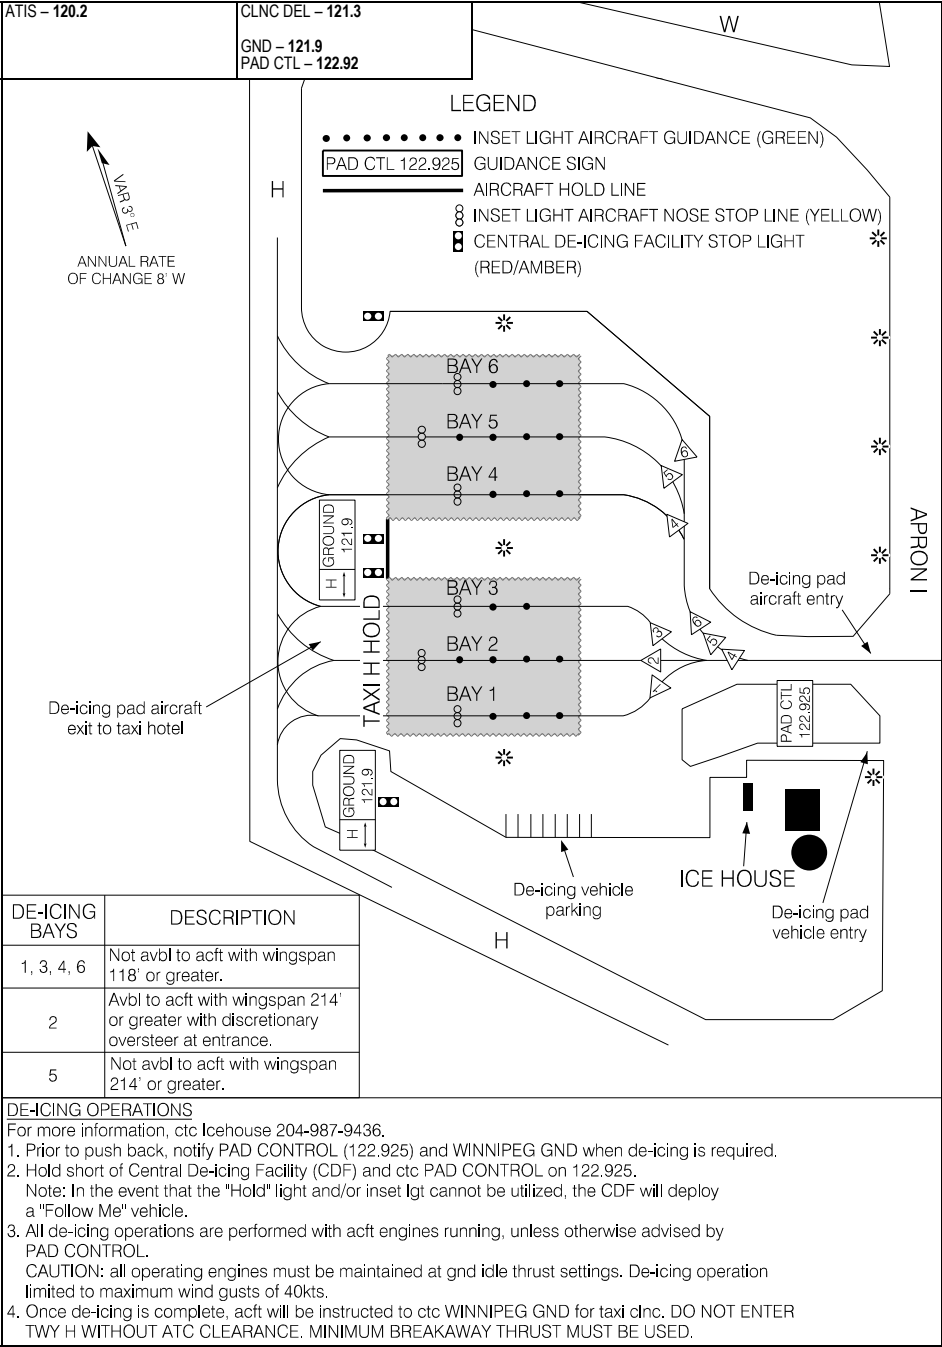

DE-ICING OPERATIONS

For more information, ctc Icehouse 204-987-9436.

1. Prior to push back, notify PAD CONTROL (122.925) and WINNIPEG GND when de-icing is required.

2. Hold short of Central De-icing Facility (CDF) and ctc PAD CONTROL on 122.925.
Note: In the event that the "Hold" light and/or inset lgt cannot be utilized, the CDF will deploy a "Follow Me" vehicle.

3. All de-icing operations are performed with acft engines running, unless otherwise advised by PAD CONTROL.
CAUTION: all operating engines must be maintained at gnd idle thrust settings. De-icing operation limited to maximum wind gusts of 40kts.

4. Once de-icing is complete, acft will be instructed to ctc WINNIPEG GND for taxi clnc. DO NOT ENTER TWY H WITHOUT ATC CLEARANCE. MINIMUM BREAKAWAY THRUST MUST BE USED.

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved

CENTRAL DE-ICING FACILITY

CYWG

EFF 21 MAR 24