



ILS CAT II or III RWY 35R

ATIS – 128.22		ARR – 126.52 (W) 123.85 127.15		125.9 (E)	TWR – 118.4 (W) 118.7 (E) 236.6		GND – 121.9 (W) 125.35 (E) 275.8		TDZL 
SAFE ALT 100 NM 13,800		LOC IRF 110.75		APCH CRS 345°		GP SIKNI 4860		LDA 14000	

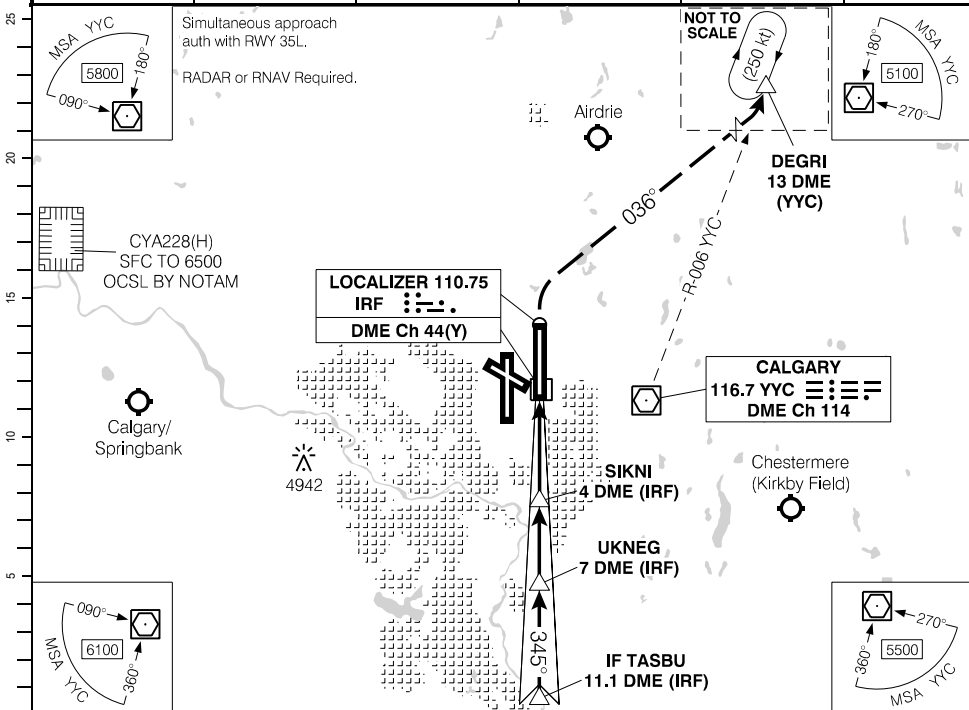


Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved

MISSED APPROACH
Climb to **4100** hdg **345°**.
Then climbing **RIGHT** turn to **7000**
hdg **036°**. Intercept OBD 'YYC'
R-006 to **DEGRI**. As required
shuttle climb.

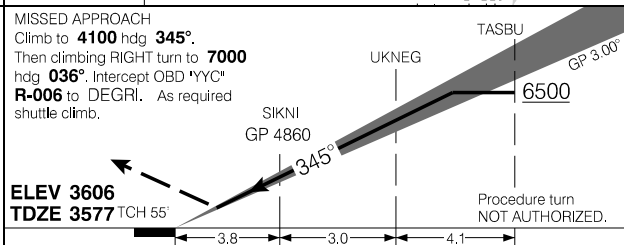

PRIOR AUTH REQUIRED FROM TC			
CAT II	3670	(100)	RVR 12
CAT III A	RVR 6		
CAT III B	NOT AUTHORIZED		
CAT III C	NOT AUTHORIZED		

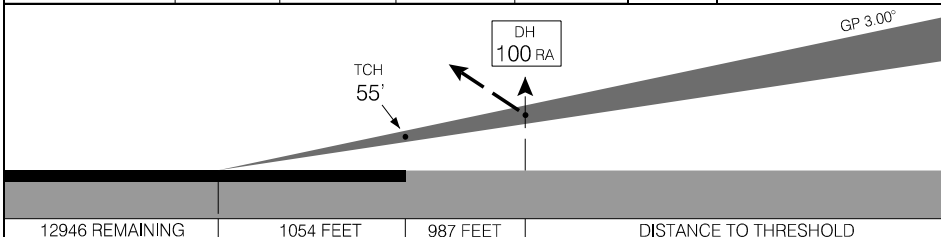

ILS CAT II or III RWY 35R

CYYC