

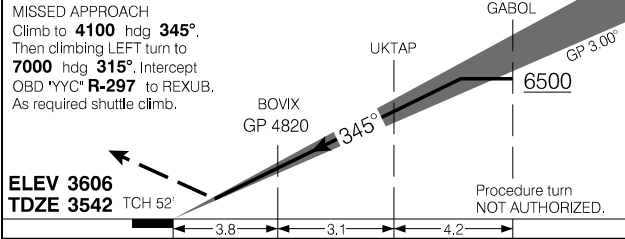


ILS CAT II RWY 35L

ATIS – 128.22	ARR – 126.52 (W) 125.9 (E) 123.85	TWR – 118.4 (W) 118.7 (E) 236.6	GND – 121.9 (W) 125.35 (E) 275.8	TDZL
SAFE ALT 100 NM 13,800	LOC IYC 111.5	APCH CRS 345°	GP BOVIX 4820	LDA 12675

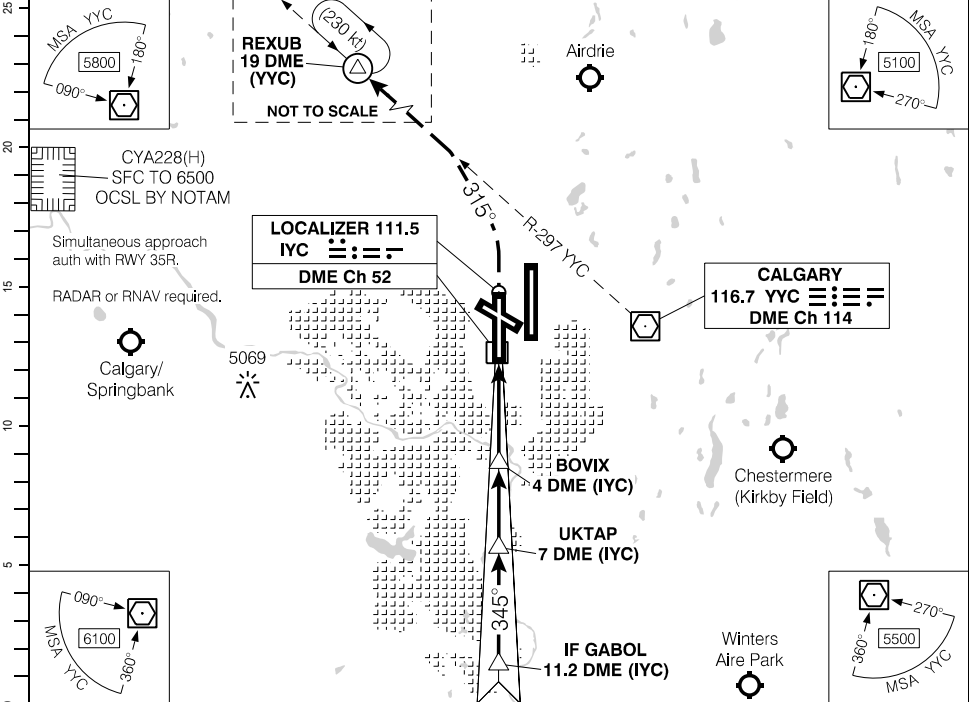

PRIOR AUTH REQUIRED FROM TC			
CAT II	3642	(100)	RVR 12

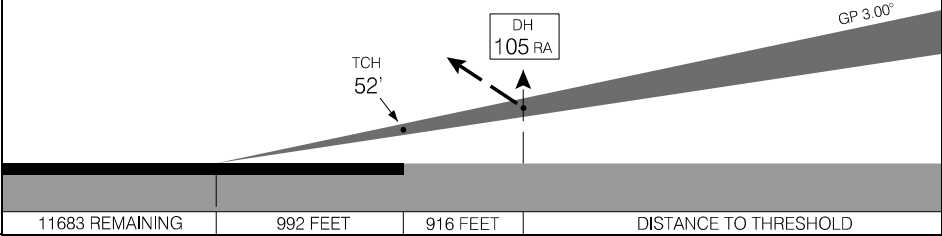

ILS CAT II RWY 35L