


ILS RWY 17R

510650N 1140113W VAR 15°E

ATIS – 128.22	ARR – 126.52 (W) 123.85 127.15	125.9 (E)	TWR – 118.4 (W) 236.6	118.7 (E)	GND – 121.9 (W) 125.35 (E) 275.8	TDZL
SAFE ALT 100 NM 13,800	LOC IEM 109.3	APCH CRS 165°	GP OMVUM 4880	LDA 12675	AL 	

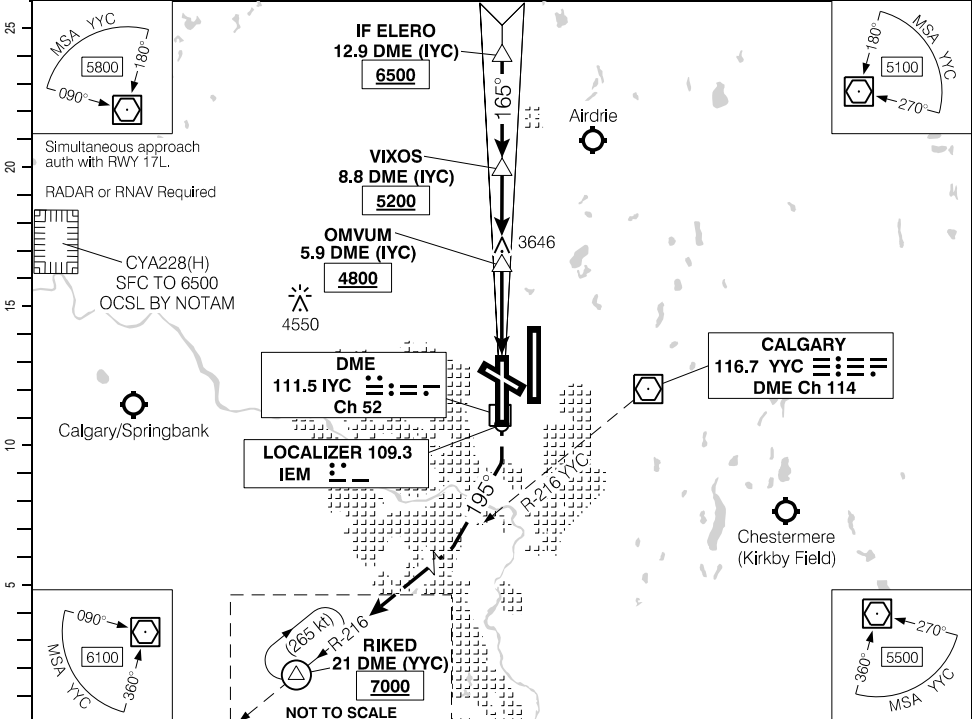

	12.9	12	11.0	10	9	8	7	6	5	4	2.8		DIST FROM DME (IYC)
	7110	6820	6500	6180	5860	5540	5220	4900	4590	4270	3900		ALT (3.00° APCH PATH)
ELERO 7110													
6500													
GP 3.00°													
VIXOS 5810													
Procedure turn NOT AUTHORIZED.													
5200													
4800													
MDA													
1.9 DME (IYC)													
ELEV 3606													
TDZE 3555													

			CATEGORY	A	B	C	D
			ILS/DME	3755	(200)	½ RVR 26	
			LOC/DME	3900	(345)	1 RVR 50	
Knots	ft/min	Min:Sec					
70	370						
90	480						
110	580						
130	690						
150	800						