



RNAV (GNSS) X RWY 06L

ATIS – 120.82	ARR – 132.8 124.47 125.4	TWR – 118.35 118.7	GND – 121.9 121.65 119.1	TDZL
SAFE ALT 100 NM 4900	WAAS Ch 80718 W06E	APCH CRS 057°	MIN ALT VEPNA 2000	LDA 9697

Simultaneous approach auth with RWY 05.
LNAV procedure not auth during simultaneous operations.

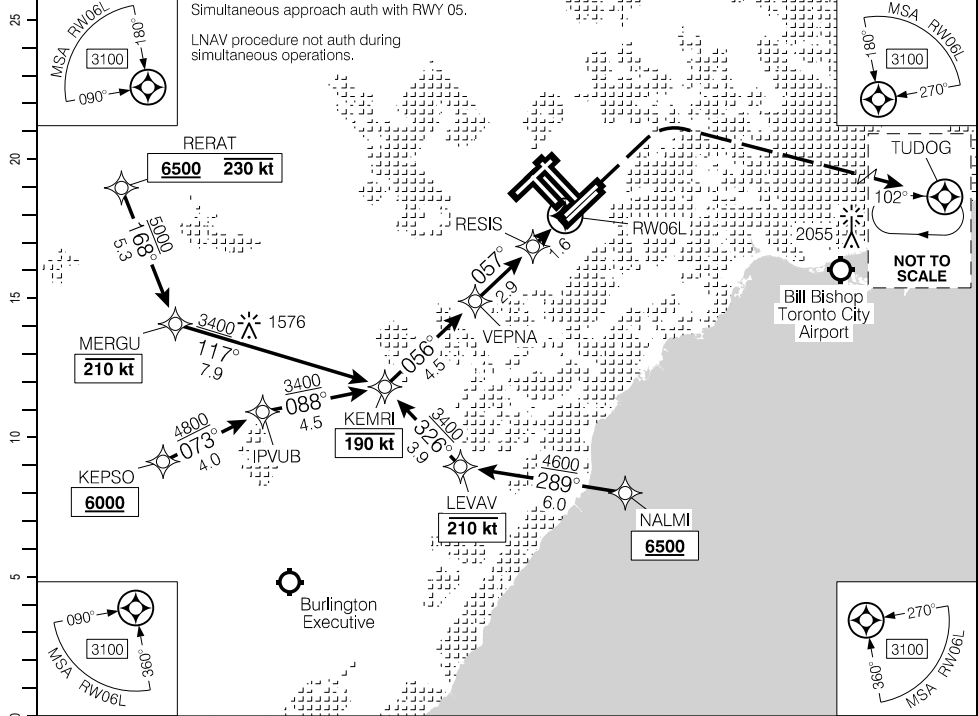

	9.0	8	7	6	5	4	3	2	1.2	DIST FROM RW06L
	3400	3130	2810	2490	2170	1850	1540	1220	960	ALT (3.00° APCH PATH)

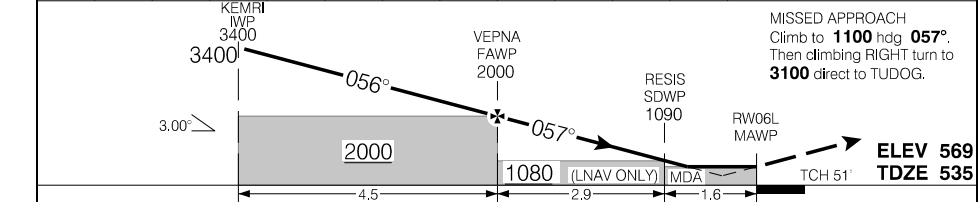

			CATEGORY	A	B	C	D	
			LPV	730	(201)	½ RVR 26		
Knots	ft/min	Min:Sec	LNAV/VNAV (min. -19°C, max. 54°C)	965	(436)	1 RVR 50		
70	370			LNAV	960	(431)	1 RVR 50	
90	480							
110	580							
130	690							
150	800							

RNAV (GNSS) X RWY 06L