



RNAV (RNP) Y RWY 08L

491141N 1231057W VAR 17°E

ATIS – 124.6	ARR – 128.6 128.17 133.1 134.22 352.7	TWR – 119.55 (N) 226.5	GND – 127.15 (N) 121.7 (S) 275.8	TDZL
SAFE ALT 100 NM 12,800	RNAV	APCH CRS 083°	MIN ALT IMITU 2200	LDA 9941

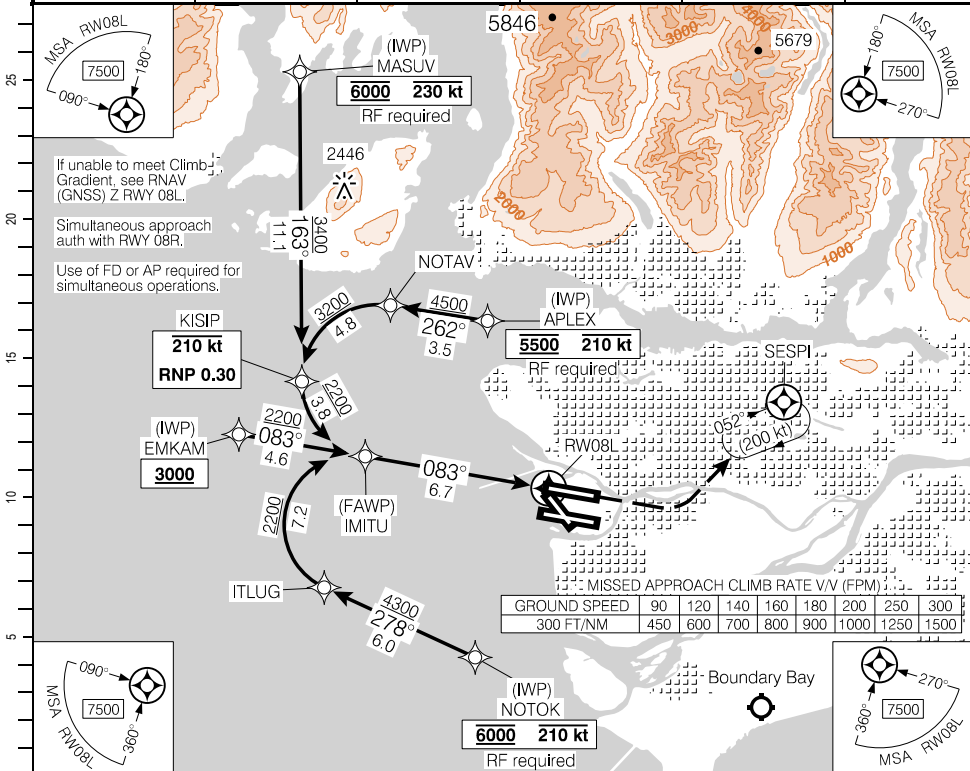

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved

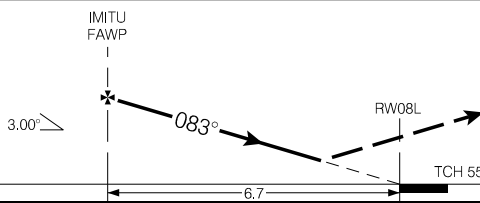

MISSED APPROACH
Requires a minimum climb gradient of **300** ft/NM to **1200**. Do not exceed **230** kt. Climb to **620** hdg **083°**. Then climbing **LEFT** turn to **3000** direct to **SESP1**. As required shuttle climb.

ELEV	13
TDZE	13

AUTHORIZATION REQUIRED (min. -18° C) (max. 54° C)	CATEGORY	A	B	C	D
	RNP 0.15	266	(253)	1 RVR 50	
	RNP 0.30	276	(263)	1 RVR 50	

RNAV (RNP) Y RWY 08L

CYVR